


200066 Panic Button Inside

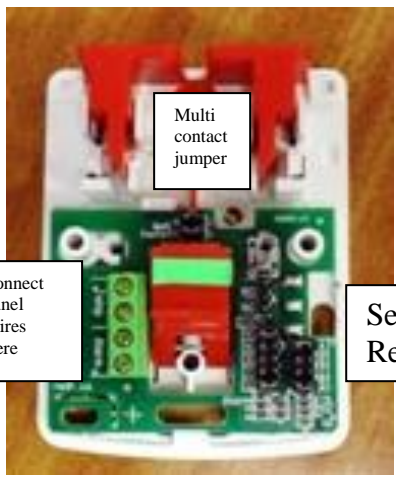

- ❶ Screw the unit base to mounting surface.
- ❷ Connect your panel wires to the terminal block as per the instructions, dependant on whether you want 4-wire, supervised or 2 in series.
- ❸ Select your resistors by moving the jumpers in line with instructions. Select Multi if you are fitting more than 1 PA to a zone
- ❹ Carefully fit the lid to the central post on the base
- ❺ Ensure no snagging occurs.
- ❻ Operation:- Push End button inwards. The microswitch will only operate when both buttons are pushed simultaneously.
- ❼ Reset :- by using the reset key (supplied)

	Model 200066		
Grade 3 Class II	●		
Microswitch Activation	●		
Tactile Switch Tamper	●		
Metal Reset Key	●		
Spare Keys to Order	●		
5 Terminals	●		
End Knock-out	●		
Back Knock-out	●		
2 Side Knock-outs	●		
Finishes	Plastic	Brass	St/Steel
	200066		
Installation Instructions	●	●	●
Dimensions	Length	Width	Height
	80	62	28mm
Selectable Resistor Values	EOL	Alarm	
Ademco, Honeywell	1K	1K	
Castle, Menvier, Pyronix, Texecom, Scantronic	2K2	4K7	
Aritech	4k7	4K7	
DSC	5K6	5K6	
Gardtec	4K7	6K8	
Guardall	8K2	8K2	

Description:
Grade 3 Class II
Double End Push Panic Button. With Selectable Resistors

Manufactured to **BS EN50131**

Materials:
ABS

Temperature Range:
-40°C to +50°C

Tampers:
Tactile Switch Tamper

Switching Current:
500mA Max DC

Voltage Range:
15v DC Max

Body Colours:
White- 200066
Black (S/Steel Cover)
Grey if requested

Surface Finishes:
Plastic 200066



VandalVeto®

אגבר אלקטרוניקה 2000 בע"מ

● רח' כורז'ין 5, גבעתיים 53583 ● טל: 03-5713004 ● פקס: 03-5711450
● www.egber.com ● egber@egber.com

Drawing No: 200066
Drawn: Amir Egber
Date: 01/01/2021

All dimensions in mm
Do not scale



www.egber.com