

HDMI/ KVM Extender

User Manual

Model: 800360

HDMI & USB Keyboard Mouse CAT5e Extender 1080p 150M



Introduction

800360 is an HDMI KVM extender that sends HDMI & USB signal over one CAT5e or greater cable. Its TX unit has a local loop out for an extra HDMI monitor. And there are 2 built-in USB ports at the RX unit to connect with one keyboard and one mouse. It is an ideal solution for CCTV, digital signage, home network integration, and so on.


Features

- Resolutions up to 1080p@60Hz & 1920 x 1200.
- Signal extension up 160M over CAT6.
- Built-in HDMI loop-out port for an extra HDMI display at TX side.
- Built-in 2 USB ports at Rx side.

Installation view



HDMI over IP Solution: support point to many connections via network switch

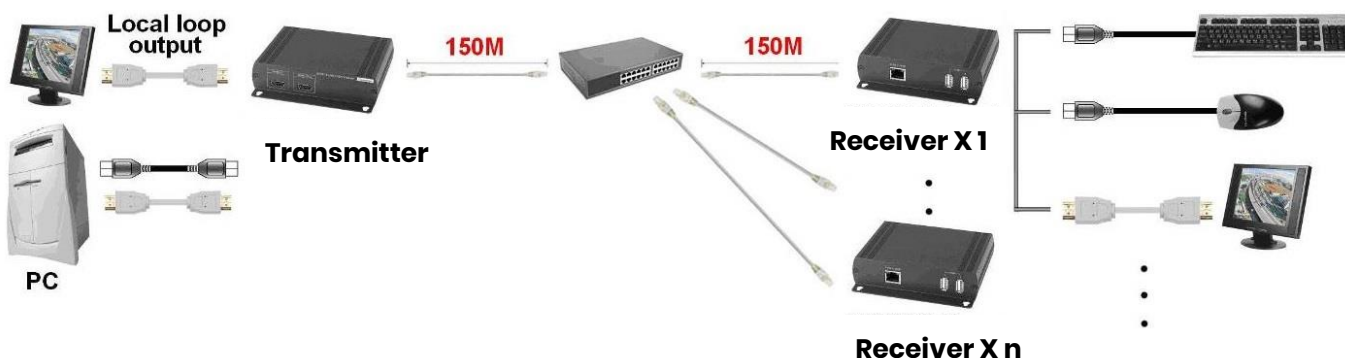


VandalVeto®

אגבר אלקטרוניקה 2000 בע"מ


• רח' כורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450
• www.egber.com • egber@egber.com

Panel View

800360T

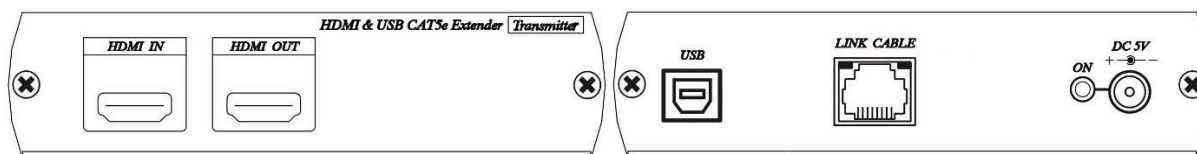

800360R

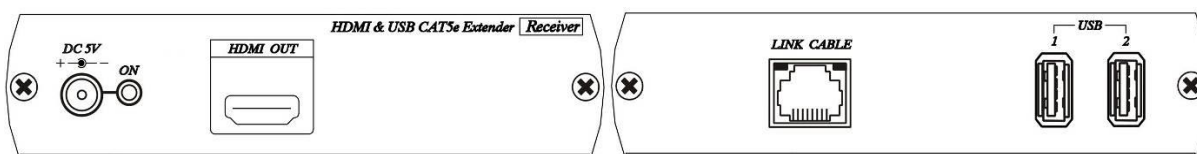

LED Indication Status

Front Panel Green LED:	Power ON/OFF
RJ45 LED: Orange Flash:	Data transmission
Green On:	Linking

RJ45 Define

Link Cable (TIA/EIA-568-B)

1. Orange-white	Data 1 +
2. Orange	Data 1 -
3. Green-white	Data 2 +
4. Blue	Data 3 +
5. Blue-white	Data 3 -
6. Green	Data 2 -
7. Brown-white	Data 4 +
8. Brown	Data 4 -

Computer IP Address Setting

System default IP address is **192.168.168.55** for **800360T**, **192.168.168.56** for **800360R** (subnet mask 255.255.255.0). Your computer must set in same subnet mask to enter the web setup page. To change the IP address of computer please follow below step: (based on Windows XP):


Right click on "My Network Place" → "Properties" then right click on "Local Area Connection" → "Properties" then double click on "Internet Protocol (TCP/IP)" to setting as below:
(IP address **192.168.168.1**, sub mask **255.255.255.0**)



VandalVeto®

מ אגבר אלקטרוניקה 2000 בע"מ


• רח' נורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450
• www.egber.com • egber@egber.com

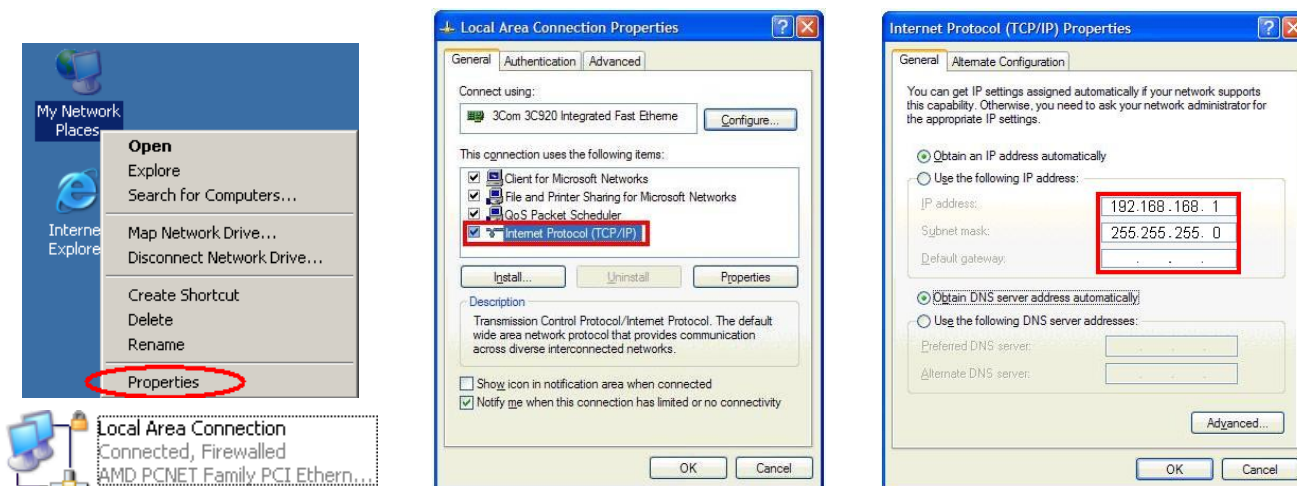

Login in to the web

Use CAT5e cable to connect transmitter/receiver RJ45 port to PC LAN port, enter the IP address of TX/RX in the web browser.

After login to the web, click System Settings you can change IP address, Subnet Mask, MAC address at System page, then click Apply to finish setting.

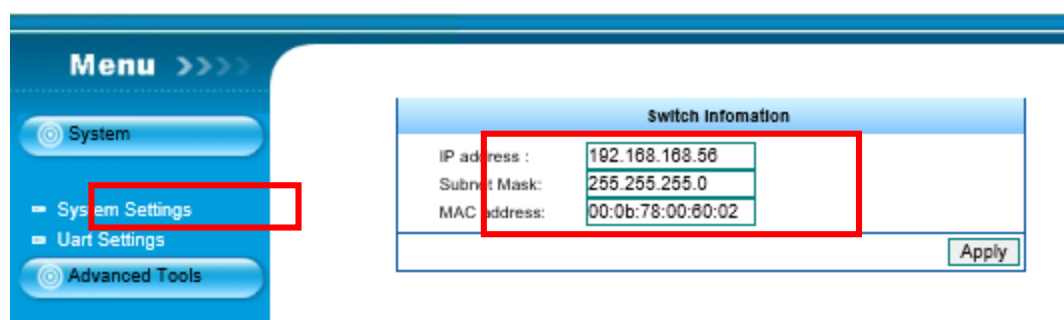

Cable

Video Link cable using high quality CAT5e UTP/STP/FTP or CAT6 UTP cable.

Caution

1. This device not support wireless and gaming keyboard mouse.
2. The cabling must away from any equipment with electromagnetic wave, i.e.: microwave, radio equipment, high voltage.



VandalVeto®

אגבר אלקטרוניקה 2000 בע"מ

• רח' כורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450
• www.egber.com • egber@egber.com

Package Include

800360T Transmitter x 1
800360R Receiver x 1
USB A to B cable x 1
DC 5V 2Amp power adapter x 2

Specification:

ITEM NO.	800360T	800360R
Support		
Max. Video Resolution	1080p@60Hz	
Max. Transmission Distance	150M over CAT5e/ CAT6	
Ports & Interfaces		
Video Input	1 x HDMI Type A	1 x RJ45
Video Output	1 x RJ45	1 x HDMI Type A
Video Loop-out	1 x HDMI Type A	
USB Interface	1 x USB Type B	2 x USB Type A
Power		
Power Supply	DC 5V 2A	DC 5V 2A
Power Consumption	1200mA	800mA
Ambient Temperature		
Operation	0 to 55°C	
Storage	-20 to 85°C	
Humidity	Up to 95%	
Physical Characteristics		
Dimensions	125 x 125 x 30mm	125 x 125 x 30mm
Weight	355g	350g



VandalVeto®

אגבר אלקטרוניקה 2000 בע"מ 

• רח' כורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450
• www.egber.com • egber@egber.com