Recessed mounted magnetic switch

Ideal for wooden door/ window

Housing: ABS material;
 fireproof ABS housing is available on request

• Max Cur./Vol./Power/Init. Ress (A/VDC/ W/m Ω) 0.5A/100V/10W/200m Ω


• Output : N.C


• Color :white/brown

• Gap: 15-25mm

• Certificates : FCC,CE ,ROHS

• Leads: 350mm in length is standard, longer leads available



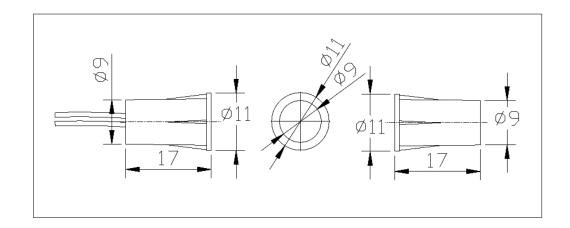

VandalVeto®

200016 Ver.16/1