

STP Cat.6 Keystone Jack # 601035

VandalVeto®



- STP Cat.6 Keystone Jack Toolless type,180Degree

Mechanical:

Shell Material: Zinc Alloy

Housing Material: PC

Insert Material: Flame retardancy PBT

PCB Material:FR-4 T=1.6MM


Contact Material: Phosphor Bronze Stamp PIN T=0.30mm

IDC Contact Material: Phosphor Bronze T=0.50mm with Tin Plating

RJ45 JACK; IFE:750 FTIMES MIN

IDC LIFE: 200 FTIMES MIN

WIRE:AWG 22-26

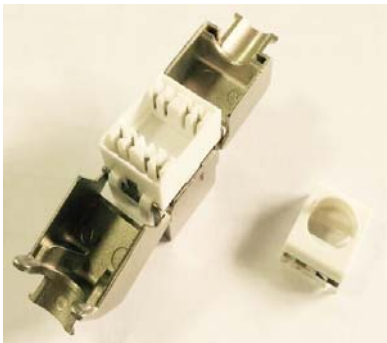

Environmental:

Storage:-40 °C to +85 °C

Operation:0 °C to 70 °C

Electrical:





Voltage Rating:125 Vac Rms

Current Rating:1.5AMP

Contact Resistance:100 Milliohms Max.

Insulation Resistance:1000 Megohms Min. @500 VDC

Dielectric Strength:750 Vac Rms 60Hz, 1Min

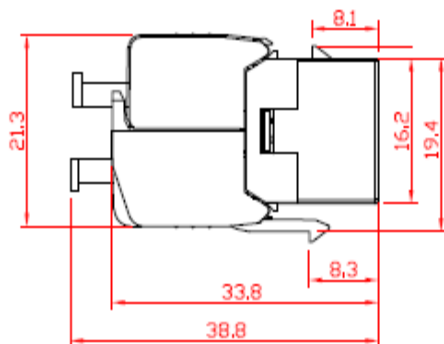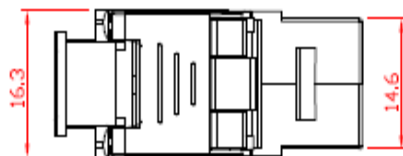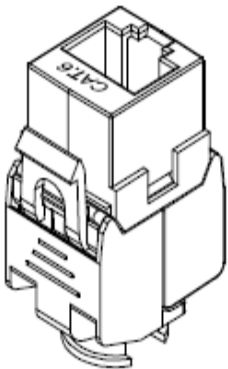

EGBER ELECTRONICS 2000 Ltd

5Korazin st, 5358305 Givatayim

Tel: 972-3-5713004 Fax: 972-3-5711450

egber@egber.com

www.egber.com

VandalVeto®