

Industrial 4 Port PoE Gigabit Ethernet Switch



700560

60W

6KV Lightning

Redundant power supply

VandalVeto®


- Standard: IEEE802.3 ,IEEE802.3u ,IEEE802.3ab,IEEE802.3z,IEEE802.3 af/at;
- Provide 2x1000BASE-X and 2x10/100/1000BASE-T uplink ports, where in 1x1000BASE-X and 1 x10/100/1000BASE-T are Combo ports;
- Provide 4x10/100/1000BASE-T adaptive downlink ports, 1~4 ports of PoE switch support IEEE802.3af/at;
- Support port(Auto MDI/MDIX)function ;
- Standard DC port and green terminal port, support power adapter with different connectors and power;
- Redundant power design, support power hot backup;
- Fanless way metal shell with heat dissipation design ;
- Fast installation and easy operation, convenient for wall, din rail and desktop installation.

CE FC


Introduction

4 ports Gigabit Ethernet PoE/HPOE switch is an unmanaged PoE Ethernet switch, which provides 2 optical, 2 Ethernet uplink ports and 4 Gigabit PoE downlink Ethernet ports, wherein 1 optical and 1 Ethernet ports are Combo ports. The product supports PoE+/PoE++ high power network Dome, which could be widely used in security network video surveillance, network engineering and other occasions.


Application

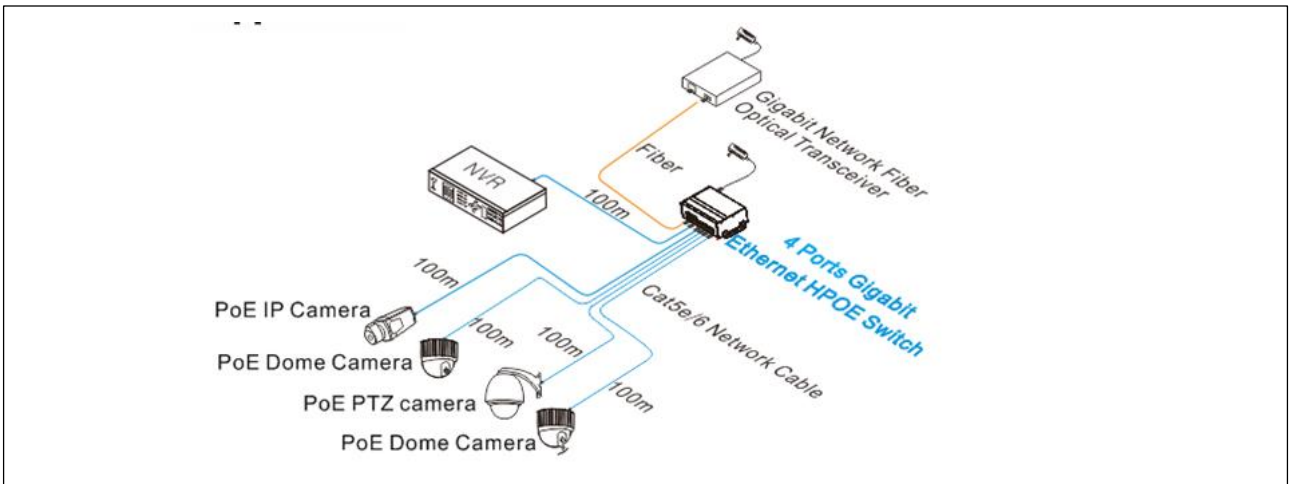

Physical Features

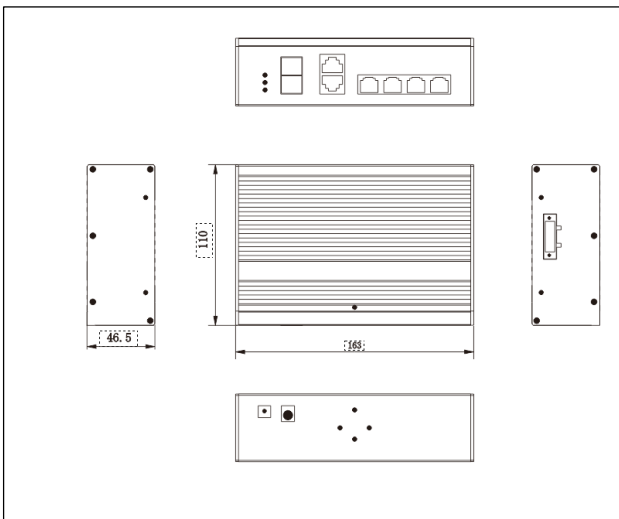

Interface drawing

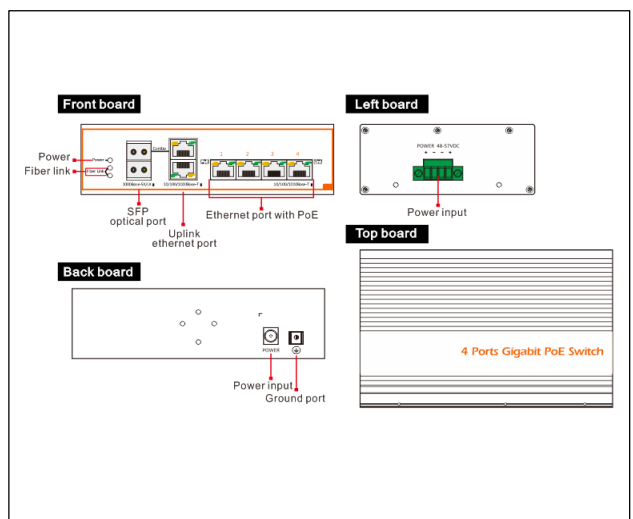

Specification

Model	
Downstream Ports	4* 10/100/1000BASE-T (PoE)
Uplink Ports	2*1000BASE-X SFP Port and 2*10/100/1000BASE-T
Network Standard	IEEE802.3、IEEE802.3u、IEEE802.3ab、IEEE802.3z、IEEE802.3 X
Switch Capacity	14Gbps
Throughput	10.4Mpps
Switch Processing Scheme	Store and Forward
Package Buffer	1Mbit
MAC Table	8K
PoE Standard	802.3af/at
PoE Type	End-span
Power Pin Assignment	1/2(+), 3/6(-)
PoE Power Output	54V DC , 60 watts max
PoE Budget	150 watts max (option 240W)
Lightning protection	6KV Execute : IEC61000-4-5
ESD	6KV Contact discharge 8KV Air discharge Execute : IEC61000-4-2
Power Supply	48~57V AC; 50/60Hz
Power Dissipation	<150W(Including PoE)
Work temperature	-40°C~75°C
Storage temperature	-40°C~85°C
Humidity(Non-condensin)	5%-95%
Dimension (L×W×H)	163mm×110mm×46mm
Weight	530kg
Regulator	CE、FCC、ROHS

VandalVeto®

5Korazin st., Givatayim 53583 Israel
 Tel: 972-3-5713004 Fax: 972-3-5711450
 www.egber.com egber@egber.com