



## DC111

Surface - overhead - door mount contact - triple biased

### High Security Contact


---

The triple biased reeds of the DC111 magnetic contact make defeat of the switch with external magnets virtually impossible. For added security, magnetic field tamper and pry tamper are standard features.

### Applications

---

The DC111 is designed for protecting high-security facilities such as airports, warehouses, manufacturing plants, banks, and military bases.

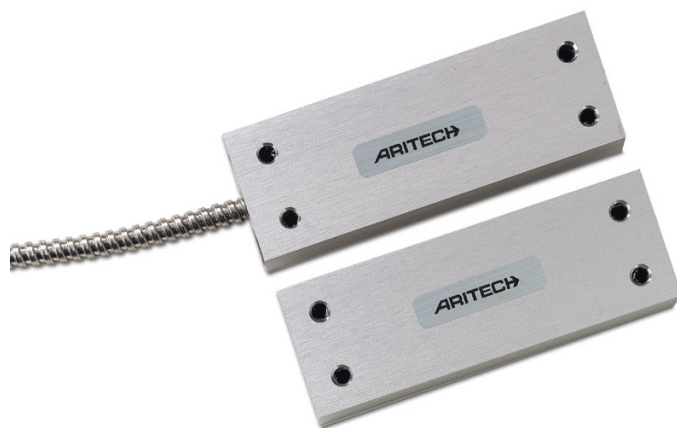

### Standard Features

---

- Triple-biased for increased security
- Pry tamper included
- No field adjustment
- Standard 2 m wire length
- Tamper loop provided

# DC111

Surface - overhead - door mount contact - triple biased

## Specifications

Operating gap	5 mm (min.); 15 mm (max.)
Connections (armoured cable)	6 wires; 2 m
Contact type	CO
Dimensions (W x H x D)	
Magnet	108 x 38 x 19 mm
Contact	108 x 38 x 19 mm
Material	Anodised alloy

## Ordering Information

Part No.	Description
DC111	Surface - overhead - door mount contact - triple biased

