Fail Safe

- Fail-safe (power to lock) electric lock
- Use with bracket for different installation to see fit
- Power input DC12V, it is also to be used with voltage lower than DC12V
- Strong holding force. DC3V is able to obtain 15kg holding force
- Low power consumption with high efficiency noise-free




Holding force (Max): 143lbs (65Kg) / DC 12V
Operation environment: Tempt. 0-80°C


• Humidity: 85%Rh max

Dimentions: Body: 60 (L)x38(W)x25(D)mm

Strike plate: 60(L)x38(W)x11(D)mm

Weight: 635gCertification: CE

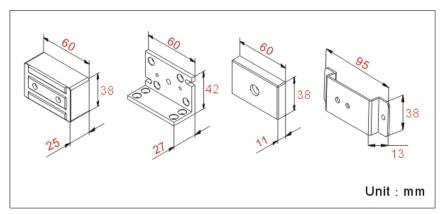

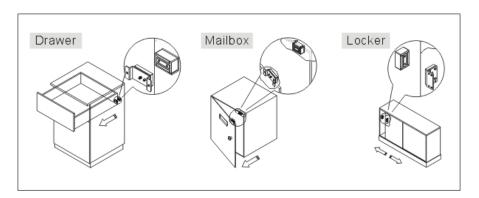





SL150-C Ver. 1/17