


SL 100 Dead Bolt lock

Dead Bolt Lock -
Power support 12vDC
Without relock function

SL-100 has its own micro computer control
own detection.

It is strongly suggested to use its own
Door open point (N.O. point) to open Door
and do not turn its power off (N.C. point)
to open door.

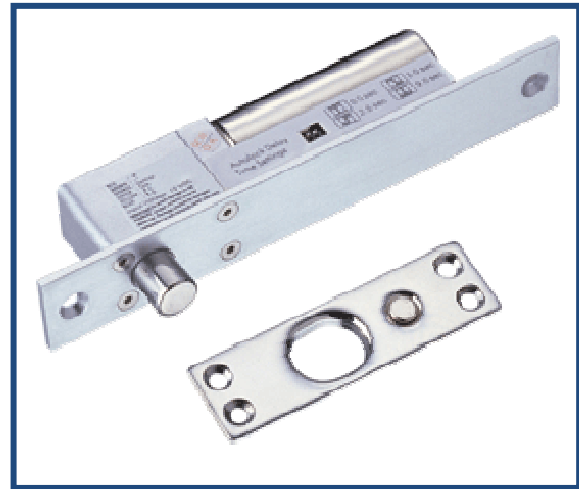

- Relock function automatic repeated locking (max. 60 times) when door is not locked at the correct position.
- Built in door open or door close state detection output point (25mA; N.C/N.O)
- Special wearable design . Mechanic life of more than 1,0000,000 times.
- Fail-safe type and MOV surge protection.
- Micro computer door position detection and current control to prevent error action and lower the lock temperature.
- Stainless steel bolt is able to sustain more than 1,200kg of shear force.
- Suitable for all types of 180° doors.
- Door lock delay time : 0/2.5/5/9 seconds available to set.
- Built-in photo couplers door open push button input contact , door will lock again automatically when door is not open within 5 seconds.
- Operation temp. 0°-90° C
- Humidity : 85%Rh max.
- Dimensions : Body : 200(L)x32(W)x40(D)mm
Strike : 90(L)x26(W)x2.5(D)mm
Bolt : 16(Throw)x15.5(Diameter)mm
- Weight : 860g
- Certification : CE

VandalVeto®