


Electromagnetic Lock

SL-200

SL-200S : Without indicator lights

SL-200 : With lock status indicator
and door position detection output (NO/NC)

SL-200T : With delay and door open push button
functions (stand-alone and do not need
to connect with access control unit)

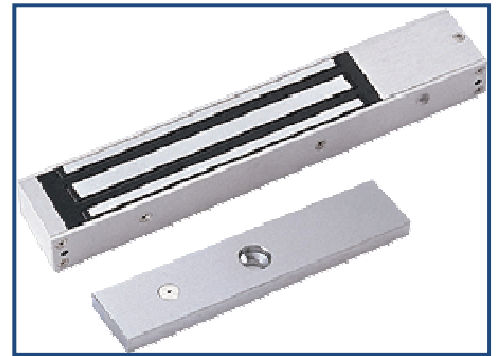

Power Supply : DC12V or DC24V (adjustable)

Current : 500mA @ 12V or 250mA @ 24V

Holding force : 250kg (600lbs)

Fail-safe (power to lock) electric lock suitable for fire exit

Automatic demagnetizer function

High efficiency with low consumption of power

Optional bracket available to install

Operation temperature : 0~90°C ; Humidity : 85%Rh max.

Dimensions: Body : 250mm(L) x 43mm(W) x 27mm(D)

Armature : 185mm(L) x 38mm(W) x 11mm(H)

Weight : 2150g

Certification: CE

VandalVeto®

Ver. 1/11