


# VandalVeto®

## TECHNICAL DATA SHEET

### 6005 Shielded Control Cable – 6X22AWG, PVC insulated and sheathed

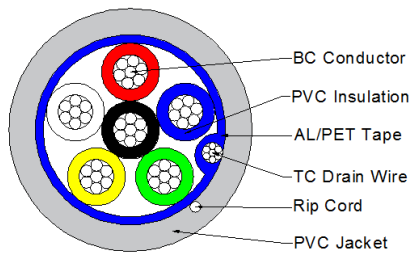

<b>Part Number</b>	<b>300451</b>	
<b>1. Conductor</b>	Material	Stranded Bare Copper, Oxygen Free Copper
	Construction	7/0.25 ± 0.005mm
	Nom. O.D.	0.75mm
	AWG Size	22AWG
<b>2. Insulation</b>	Material	Flame Retardant PVC
	Nom. O.D.	1.35 ± 0.1mm
	Nom. Wall Thickness	0.30mm
	Min.Wall Thickness	0.25mm
<b>3. Shielding</b>	Material	Blue AL/pet tape
	Construction	AL face out, against the TC drain wire, 100% coverage
<b>4. Drain Wire</b>	Material	Stranded Tinned Copper
	Construction	7/0.18 ± 0.005mm
<b>5. Rip Cord</b>	Material	Stranded rip cord
<b>6. Jacket</b>	Material	Flame Retardant PVC, Grey, RAL7037
	Nom.External O.D.	5.3 ± 0.2mm
	Nom.Wall Thickness	0.55mm
	Min.Wall Thickness	0.50mm
<b>Conductor DCR</b>	57.4 Ω / Km, Max.	
<b>Operating Temp.</b>	-20C to 70C	
<b>Voltage Rating</b>	300 Volt, Max.	
<b>Flame Rating</b>	IEC 60332-1	
<b>Packing Length</b>	200m Plywood Reel	
<b>Packing Weight</b>	10.5 Kg / 200m Reel	



אגבר אלקטרוניקה 2000 בע"מ 

רח' כורזין 5, גבעתיים 5358305, טל: 03-5713004 פקס: 03-571150

www.egber.com egber@egber.com