


VandalVeto®

TECHNICAL DATA SHEET

6005 Shielded Control Cable – 8X22AWG, PVC insulated and sheathed

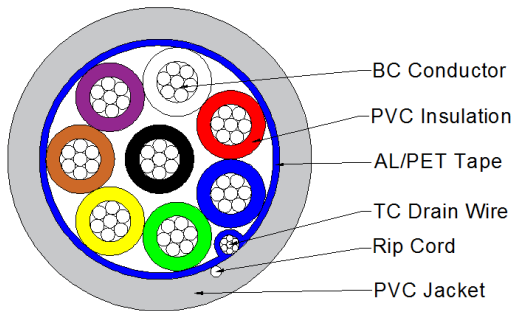

Part Number	300452	
1. Conductor	Material	Stranded Bare Copper, Oxygen Free Copper
	Construction	7/0.25 ± 0.005mm
	Nom. O.D.	0.75mm
	AWG Size	22AWG
2. Insulation	Material	Flame Retardant PVC
	Nom. O.D.	1.35 ± 0.1mm
	Nom. Wall Thickness	0.30mm
	Min. Wall Thickness	0.25mm
3. Shielding	Material	Blue AL/pet tape
	Construction	AL face out, against the TC drain wire, 100% coverage
4. Drain Wire	Material	Stranded Tinned Copper
	Construction	7/0.18 ± 0.005mm
5. Rip Cord	Material	Stranded rip cord
6. Jacket	Material	Flame Retardant PVC, Grey, RAL7037
	Nom. External O.D.	5.9 ± 0.2mm
	Nom. Wall Thickness	0.55mm
	Min. Wall Thickness	0.50mm
Conductor DCR	57.4 Ω / Km, Max.	
Operating Temp.	-20C to 70C	
Voltage Rating	300 Volt, Max.	
Flame Rating	IEC 60332-1	
Packing Length	200m Plywood Reel	
Packing Weight	12.8 Kg / 200m Reel	



אגבר אלקטרוניקה 2000 בע"מ



רח' כורזין 5, גבעתיים 5358305, טל: 03-5713004 פקס: 03-571150

www.egber.com egber@egber.com