


## VVSBT2500 – Handicap Swing door

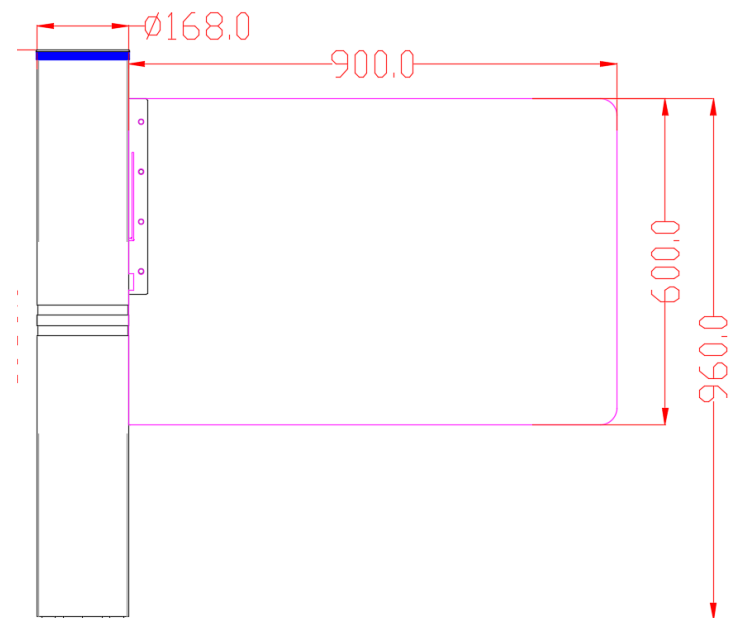

## Product overview

The whole framework of swing barrier is made of 304 stainless steel, The turnstile not only provide people with civilized and orderly transit manner but also prevent the illegal in and out effectively. Meanwhile, in the emergency, the wing will open automatically.

Waterproof level:IP54

## Technical Parameters

Structure	304 stainless steel
Glass door size	900*600mm
Pillar diameter	168mm
Power supply	AC100-240V 50/60Hz
Transit speed	30--45 persons/min
Communication interface	RS485 interface, TCP/IP
Working temperature	-20°C-50°C
Working environment	indoor, outdoor (with a tent)
Humidity	≤95%
Net Weight	50kg/pcs
Life-span	5-8 million times

## Main Functions


### MAIN FUNCTIONS

- 1.self-examine and alarm function
- 2.Programable running status
- 3.Anti-pinch function
- 4.Lock automatically
- 5.Gate synchronization (adjustable)
- 6.Light and sound alarm function
- 7.Automatically reset function
- 8.Compatible with access control system
- 9.Lock automatically when power off
- 10.lock automatically when power on
- 11.single or bi-direction
- 12.controlled and managed by RC

### Extendable functions

- 1.Count
- 2.The length of casework and barrier is optional
- 3.LED direction displayer (color optional)
- 4.Voice input to indicate the direction

## Operation

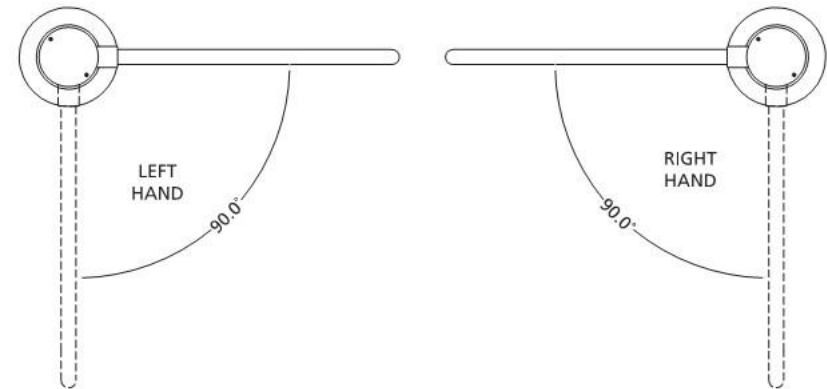

## Optional Configurations



RFID Card



Barcode



Token Machine



RC



Fingerprint



Facial Recognition