

No Touch Exit Buttons

סדרת לחצני יציאה ללא מגע






- Diameter of 19mm ,22 mm or 38mm to accommodate and mount in different panels.
- Specially designed to prevent any interference from other infra-red.
- Infrared proximity has a total lifespan of 100,000 hours.
- Standalone use. Optional panel available to select.
- Activate without pressing to prevent any disease contagion. It is suitable for access control system that widely used in public areas such as hospitals or restaurants. It is also can be used as auto-control detection.
- Built-in micro controller with power on self testing function. Adjustable proximity distance and door open delay time.

Specification


	800442			800443 800447
Dimensions	ø19mm	ø19mm	ø22 mm	ø38 mm
Maximum current DC 24V	30mA	30mA	35mA	45mA
Weight	10g	21g	24.5g	50g
Case	Polycarbonate fireproof	Polycarbonate fireproof + Stainless Steel		
Power input	DC 12~24V ±10%			
Contact load	0.5A@AC120V / 1A@DC24V			
Range	4~15 cm (±25%)			
Output state	Trigger state (0.5~20sec) or toggle mode output N.C. & N.O. Output			
Output delay time	0.5~20 Seconds, set 20 sec as toggle mode			
Water resistant IP	IP65			
Life time	Relay mechanical lifespan:1000,000			
Infrared sensor	100,000 hours			
State indicator	Red and Green Double-colored LED light			
Operation temperature	-10℃ ~ 70 ℃			

Series Model

- 800442 : Ø19mm Polycarbonate fireproof
- : Ø19mm #304 Stainless Steel case
- : Ø22mm #304 Stainless Steel case
- 800443 : Ø38mm #304 Stainless Steel case
- 800447 : Ø38mm #304 Stainless Steel case

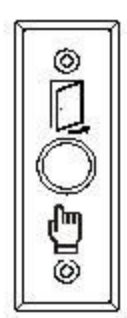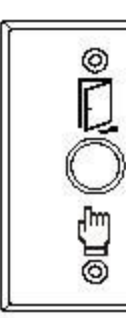Single switch	Package		
			
	Dimensions: 115×39×4.5mm	Dimensions: 115×70×4.5mm	Dimensions: 86×86×4.5mm
	800442		
	800442		
	800442		
		800443	800447

Application

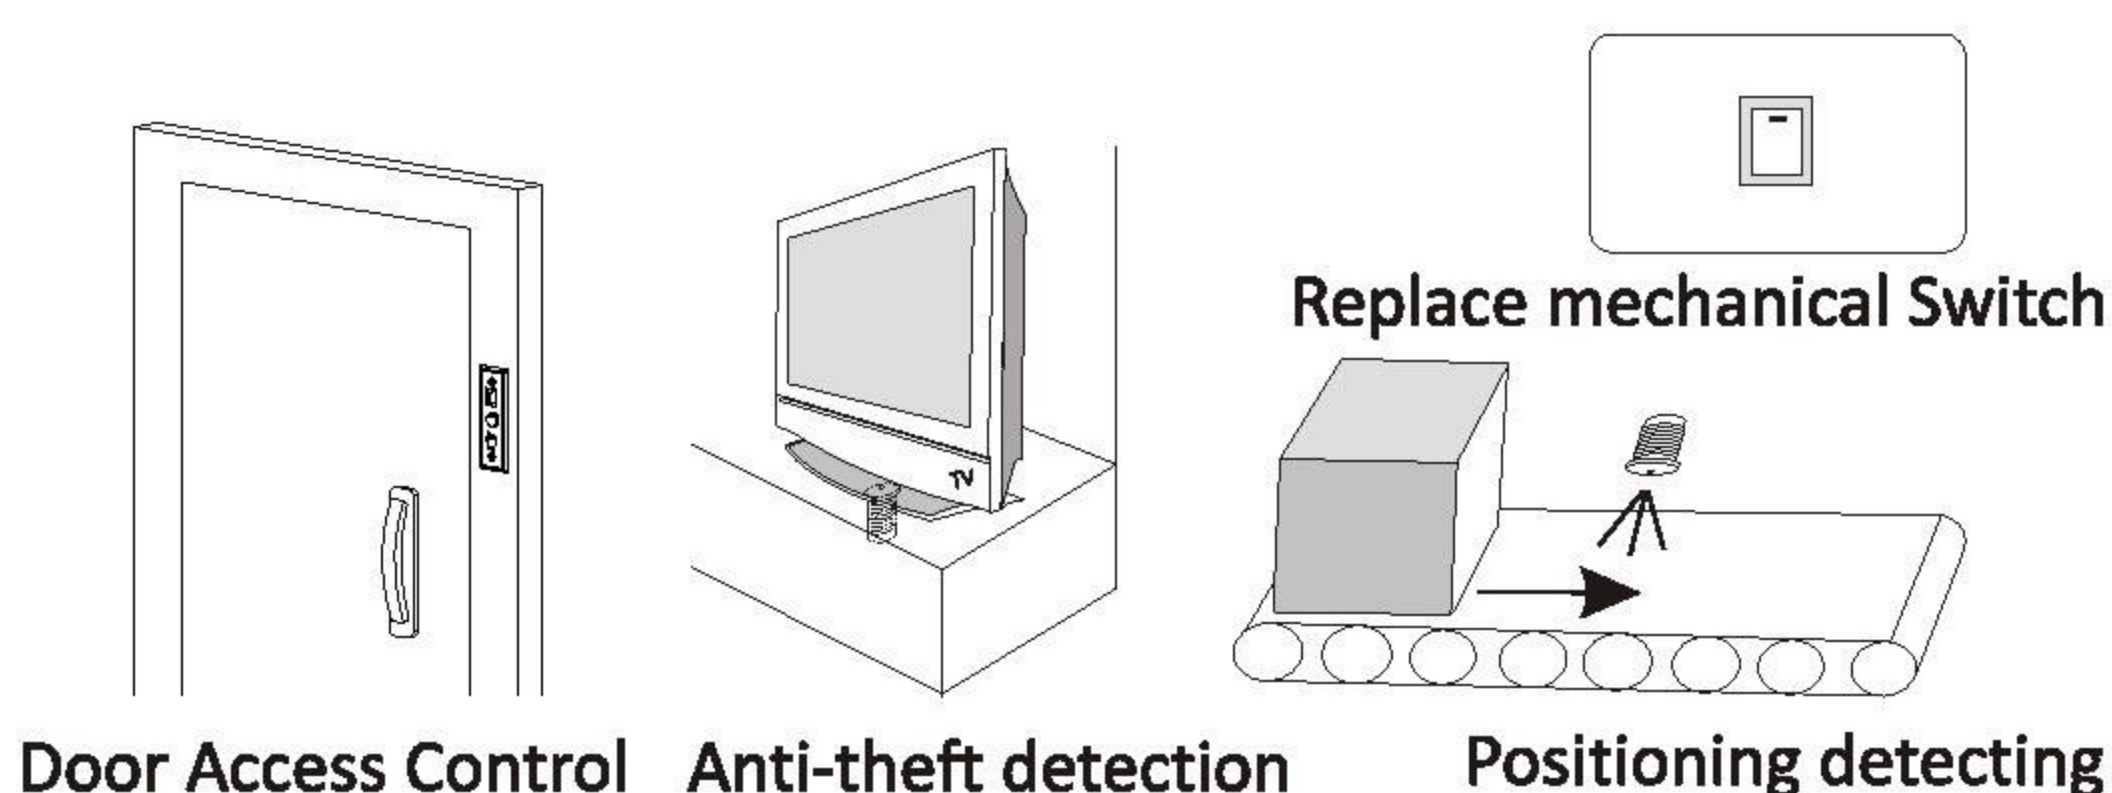


Instruction

Model: 800443/447

- Standby:Red
- Action:Green


Model: 800442

- Standby:Red
- Action:Green

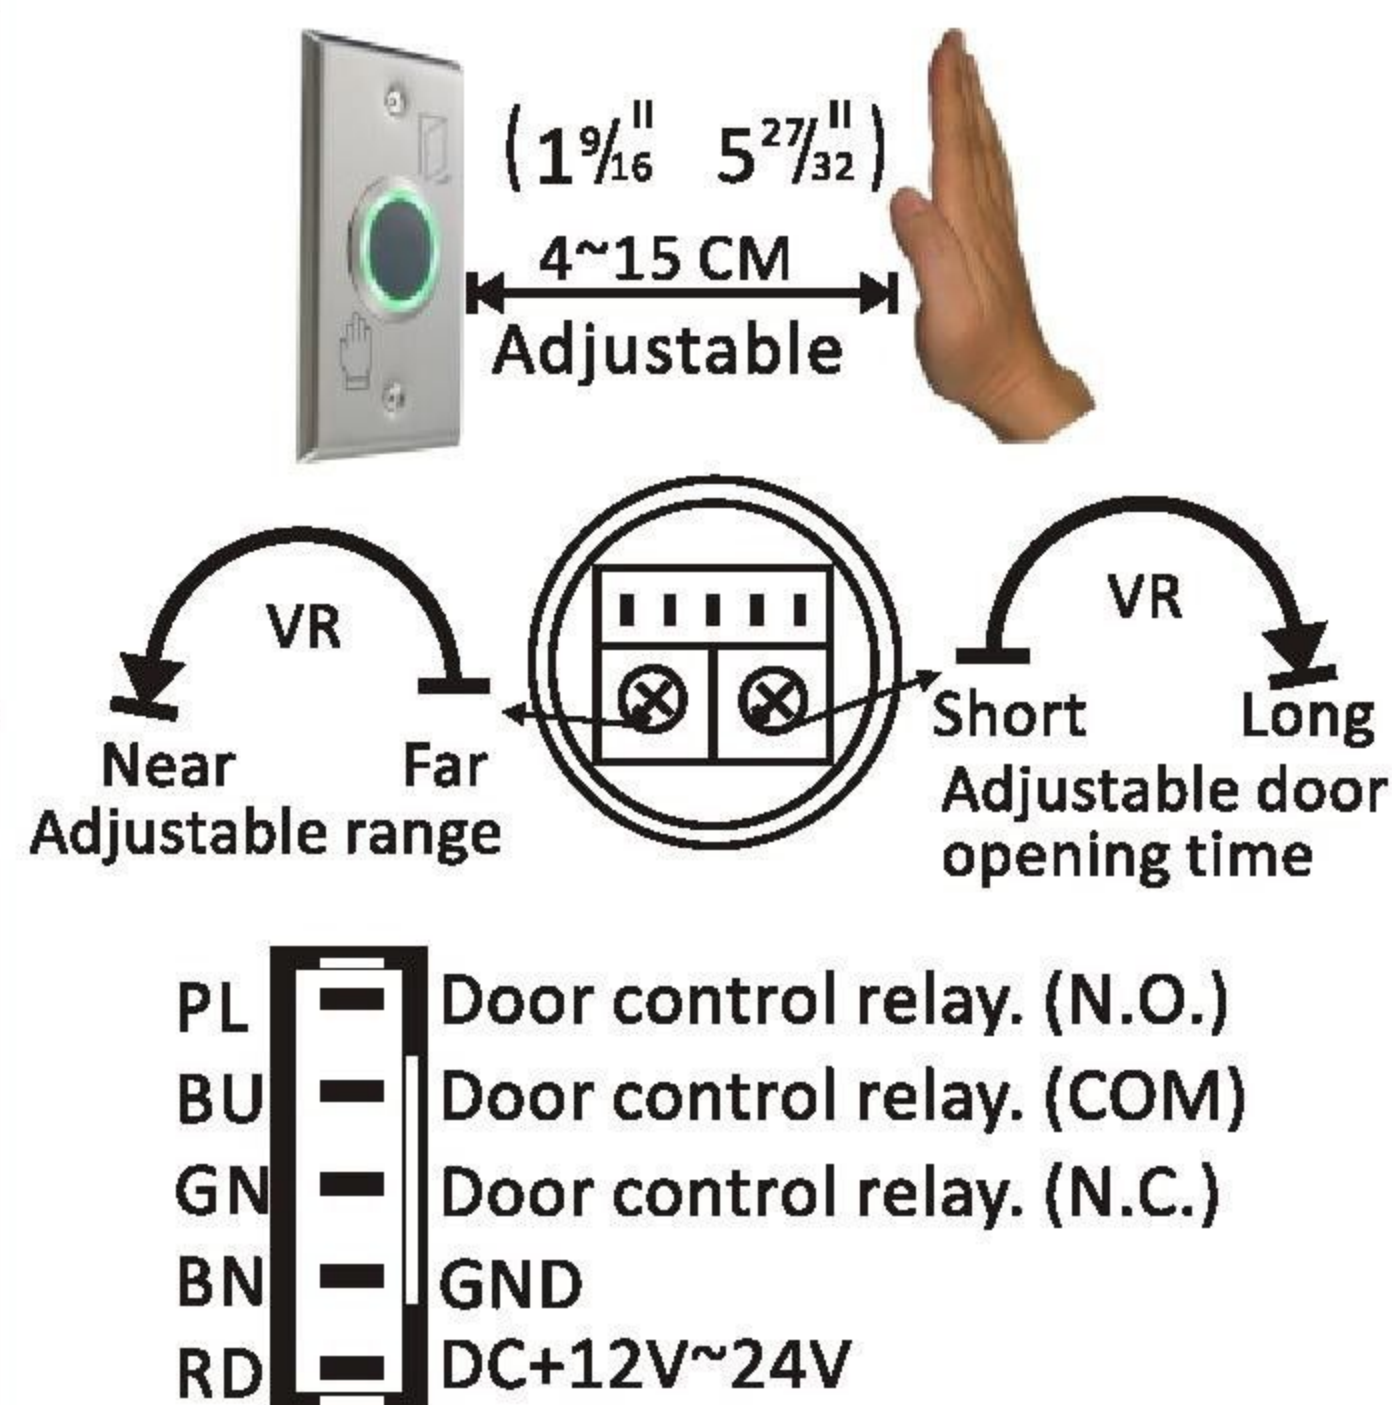

Dimensions

Unit:mm

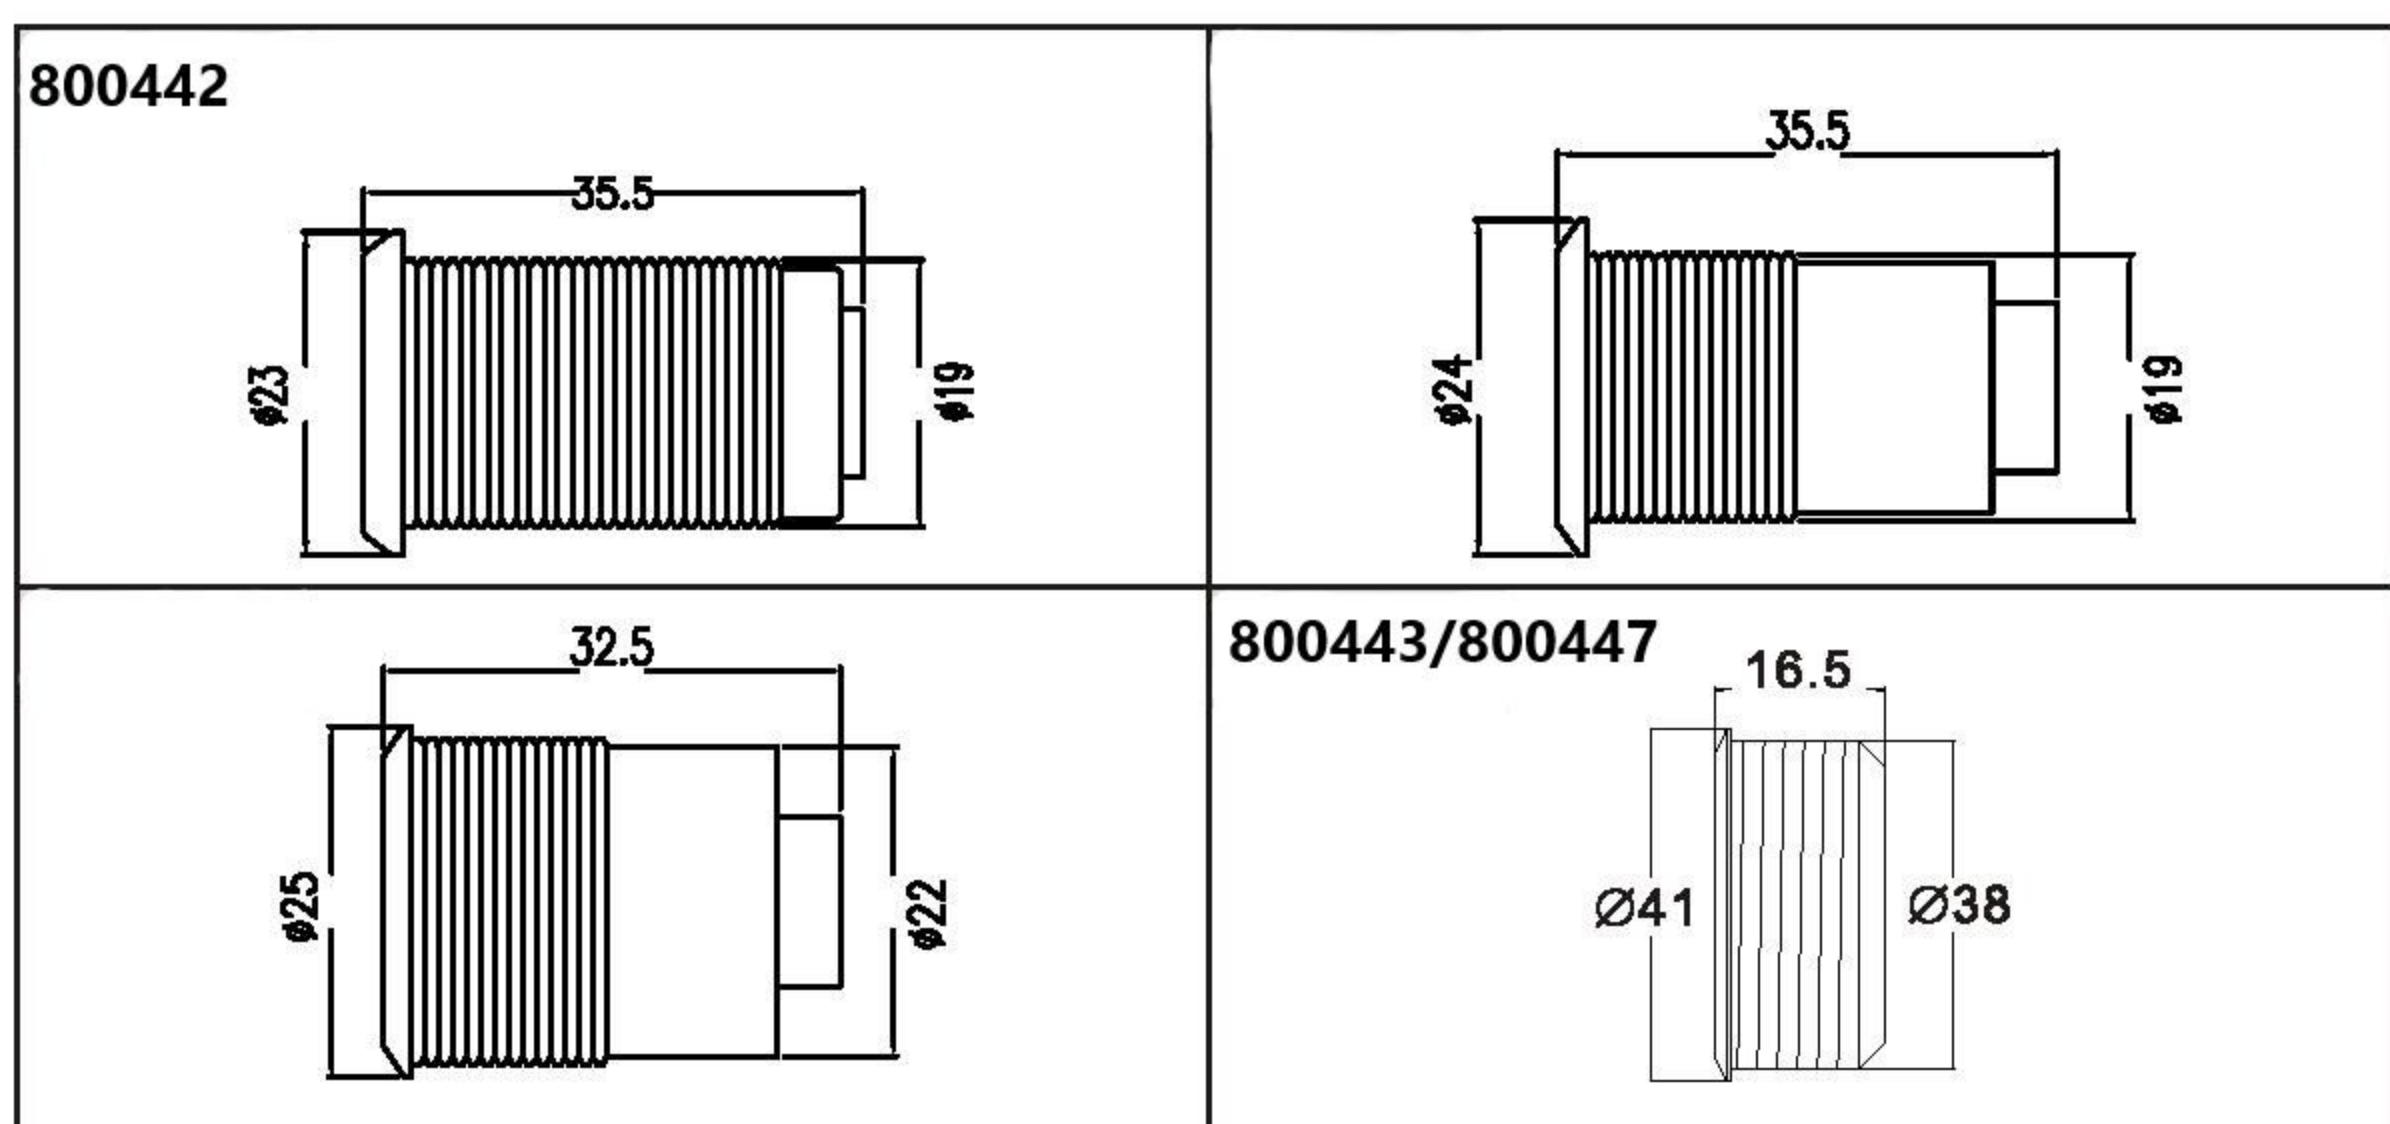

VandalVeto®

אגבר אלקטרוניקה 2000 בע"מ

רח' כורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450
www.egber.com • egber@egber.com