


# VandalVeto®

## TECHNICAL DATA SHEET

### Drop Cable– 4X0.8 - 4Core 20AWG, PVC insulated and sheathed

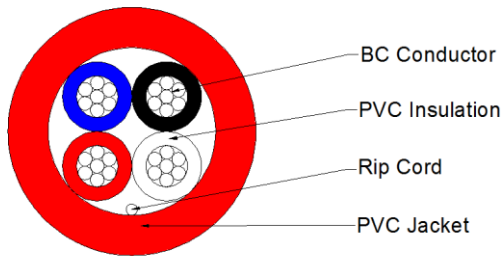

<b>Part Number</b>	<b>300417</b>	
<b>1. Conductor</b>	Material	Solid Bare Copper, Oxygen Free Copper
	Construction	1/0.80mm
	Nom. O.D.	0.80 ± 0.005mm
	AWG Size	20AWG
<b>2. Insulation</b>	Material	Flame Retardant PVC
	Nom. O.D.	1.4 ± 0.1mm
	Nom. Wall Thickness	0.30mm
	Min. Wall Thickness	0.25mm
	Color Codes	Red, Blue, Black, White, 4 cores twisted
<b>3. Rip Cord</b>	Material	Stranded rip cord
<b>4. Jacket</b>	Material	Flame Retardant PVC, Red, RAL3000
	Nom. External O.D.	5.0 ± 0.2mm
	Nom. Wall Thickness	0.8mm
	Min. Wall Thickness	0.7mm
<b>Conductor DCR</b>	35.5 Ω / Km, Max.	
<b>Operating Temp.</b>	-20C to 70C	
<b>Voltage Rating</b>	300 Volt, Max.	
<b>Flame Rating</b>	IEC 60332-1	
<b>Packing Length</b>	200m Cardboard Reel	
<b>Packing Weight</b>	8.7 Kg / 200m Reel	



אגבר אלקטרוניקה 2000 בע"מ



רח' כורזין 5, גבעתיים 5358305, טל: 03-5713004 פקס: 03-571150

www.egber.com egber@egber.com