

NOTES:

ELECTRICAL:


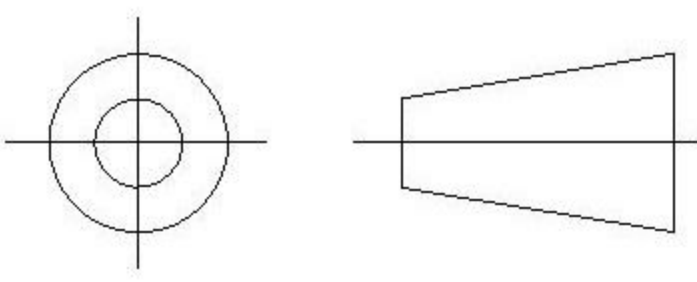
1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
6. RJ11 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 22-26

					 VandalVeto®		אגבר אלקטרוניקה 2000 בע"מ רח' כורז'ין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450 www.egber.com • egber@egber.com								
						Material		ABS		Item No.		601039			
SYM		Number		Bill No. of Alteration		Signature		Date		Angles Projection		Size Scale Unit			
Drawn		Ding jian bo		2015. 12. 11		Tolerance 0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- Angle ±0.25 ±30'				A4 X:1 mm		Part Name		STP Keystone Jack Toolless Type	
Checked		Ge pei jun		2015. 12. 11								ERP		Part No.	
Approved		Wang wei jun		2015. 12. 11								Sheet		1 OF 1	