
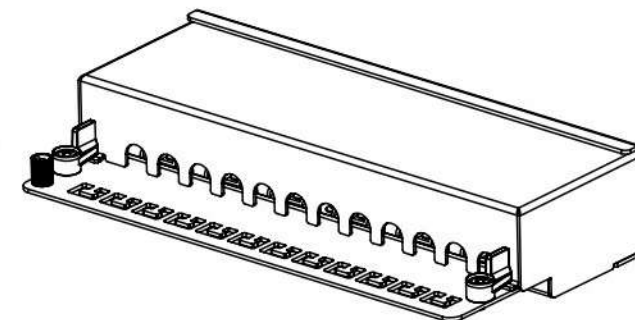
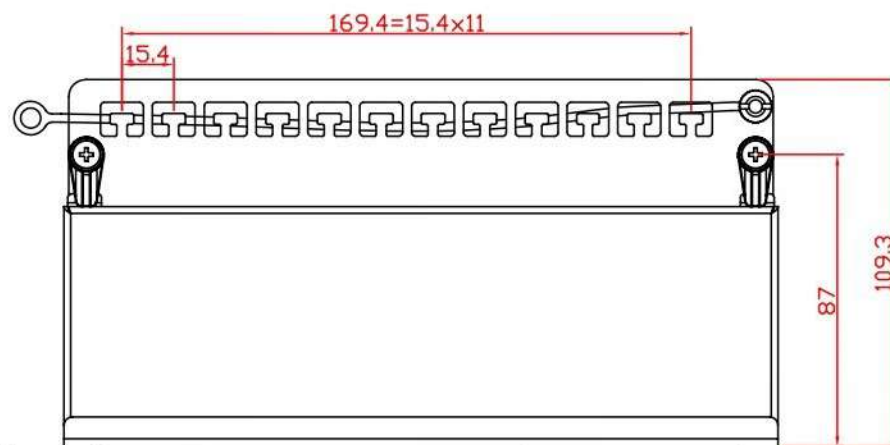
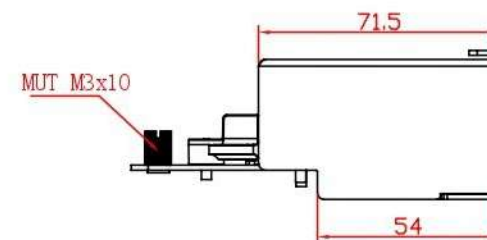


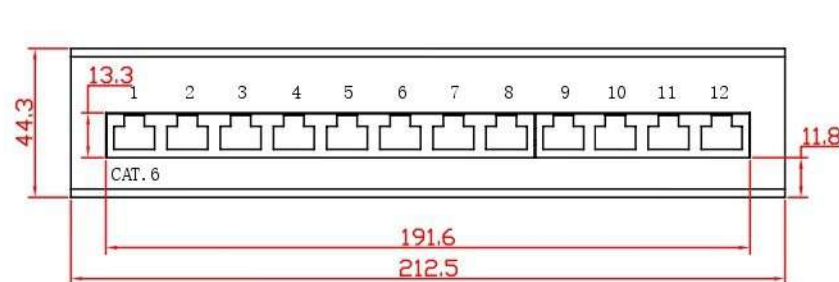

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO $+85^{\circ}$
2. OPERATION: 0° TO 70°

MECHANICAL:

1. PANEL FRAME: CARBON STEEL, POWDER,
COATING IN BLACK COLOR, Spcc1.5mm;
2. PCB MATERIAL: FR-4 T=1.6mm
3. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
4. SHIELD MATERIAL: STAINLESS STEEL,
T=0.2mm
5. RJ45 JACK LIFE: 750 TIMES MIN
6. IDC LIFE: 200 TIMES MIN
7. WIRE: AWG 22-26

						40 שנים VandalVeto® אגבר אלקטרוניקה 2000 בע"מ רח' כורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450 www.egber.com • egber@egber.com								
						Material			Item No.			601123		
						Angles Projection		Size	Scale	Unit	Part Name	12 Ports CAT.6 STP Patch Panel		
								A4	X:1	mm				
						Sheet		1 OF 1	Version: A/0		ERP			
											Part No.			
						Tolerance								
						0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30'								
						Drawn								
						Checked								
						Approved								