

Online Coaxial Surge Protection Device

ITEM NO: 800608

Application for protects equipment from high voltage surges such as lightning strikes. UL grounding requirements for coaxial cable offer protection from hazardous voltages that may occur on the shielding. Because of the physical length of ground wires, UL grounding systems may appear as an open circuit to lightning caused, high frequency surges and provide no protection from these surges getting into a home and destroying CATV converters, TV sets, VCR, Camera etc.

Features:

- Performs a different function than grounding requirements.
- Protects equipment from high voltage surges from nearby lightning strikes.
- Two stage protection: 130V, AC/DC 12V
- Wide range of applications: CCTV system, Antenna of Television, satellite receivers, FM receivers, video camera, monitors, multiplexers & Quad processor, VCR, etc.

800608 Power Surge protection Device



2 pin terminal for power input to 2 pin terminal for power output.

Two stage protection, AC/DC 130V

Max power input AC 40V(MAX), DC 56V(MAX)

Installation View:

800608

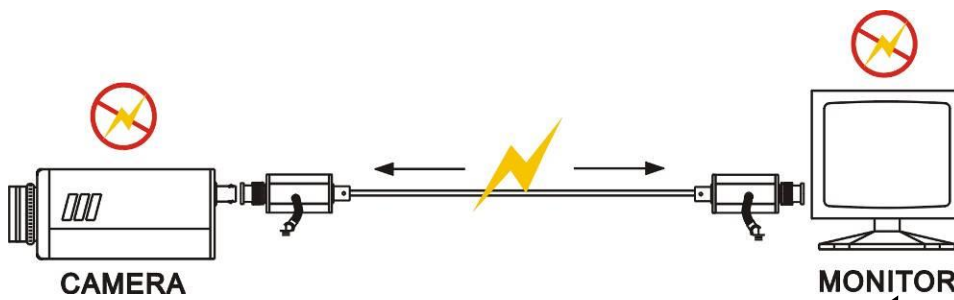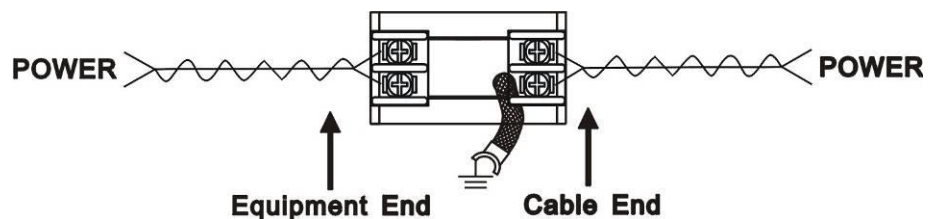

Application

- CATV System
- Antenna of Television
- Video Cassette Recorders
- FM receivers
- Video Cameras and monitors
- Multiplexers and Quad Processor

Note:

For ensuring the unit can protect equipments, the cable must be connected to ground.

Specification:

ITEM NO.	800608
Surge Protection Attack Time	1 ns
Maximum Surge Voltage	4 KV
Surge Life	300 surges of 100Amps
Normal Resistance Across Coax	10,000 MΩ
Surge Resistance	Approx. 0Ω
BAND PASS	0~1 GHZ
Power Passing Capability	130V DC / AC, 65 Vrms at10 Amps
Insertion Loss	Less than 0.2 dB
Return Loss (75 ohms)	16dB
Power IN Put	AC 40V(MAX), DC56V(MAX)
Connectors	Terminal
Dimensions W x H x D mm	65x25x25
WEIGHT g	65

RoHS CE FC



VandalVeto®

אגבר אלקטרוניקה 2000 בע"מ 

• רח' כורזין 5, גבעתיים 53583 • טל: 03-5713004 • פקס: 03-5711450
• www.egber.com • egber@egber.com