


Perimeter Infrared Beams



Dual Beams

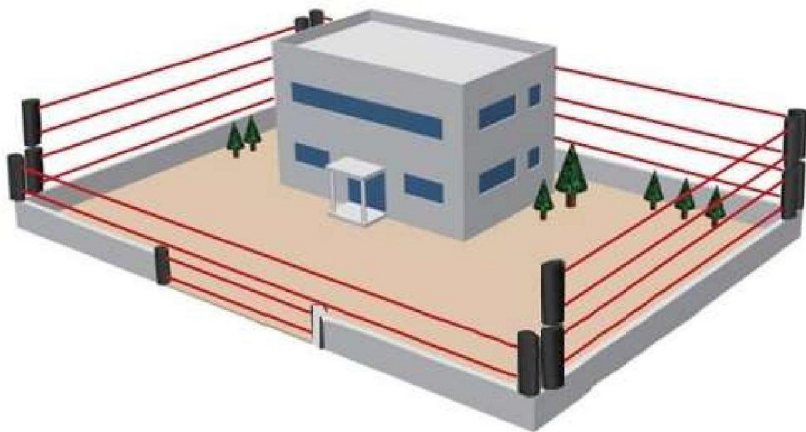

Features

 NC/NO relay outputs and tamper function, compatible with other alarm systems like Honeywell, Bosch, Paradox, DSC, and GE, etc.

 4-channel frequencies, avoiding cross-interference

 2-bit digital display, showing the signal strength

 Ip65 weather protection

 Intelligently heating in cold condition



Parameters

Model	201053	201054		201055
Detection Range Outdoor	40m	60m	80m	100m
Detection Range Indoor	120m	180m	240m	300m
Detection Method	Simultaneous interruption of 2 infrared beams			
Frequencies	4 different channels selectable			
Interruption Time	50ms,100ms,300ms,700ms (selectable)			
Power Supply	DC/AC 12~24V			
Current Consumption	70mA max	75mA max	80mA max	85mA max
Alarm Period	≥1.5sec			
Alarm Output	1C. relay output (AC/DC30V, 1.0A max)			
Tamper Switch	NC, opens when cover removed			
Operating Temperature	-25°C to +55°C			
Environment Humidity	95% max			
Alignment Angle	Horizontal 180°(±90°), Vertical 20°(±10°)			
Mounting	Outdoor or indoor, Wall or Pole			
Protection Degree	IP65			
Material	PC engineering plastic			
Dimension (L*W*H)	212*80*75mm			
Weight (TX & RX)	1000g			