




**6750W**

## HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2

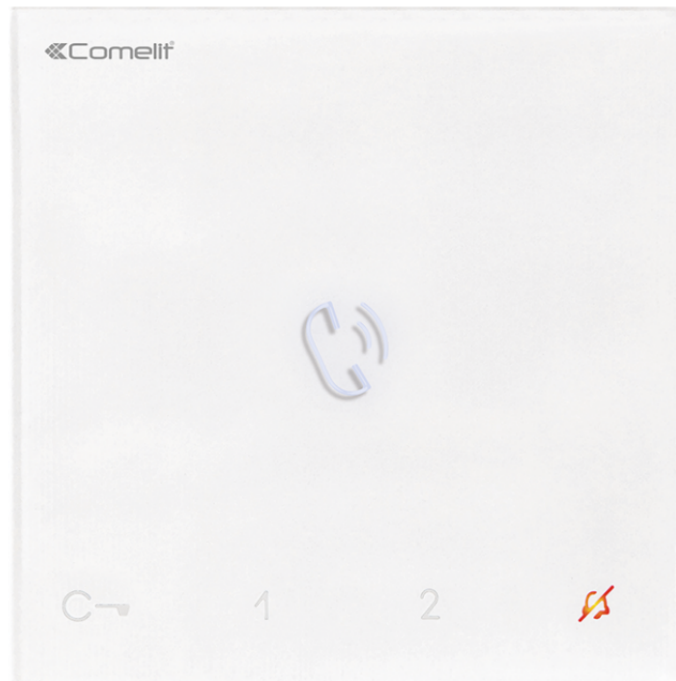

Mini series door-entry phone with full-duplex audio and integrated magnetic induction amplification system. Allows loudspeaker volume control and ringtone volume control, with choice of different melodies. Equipped with 5 touch sensitive buttons for audio key, lock-release, actuator control, switchboard call and privacy function, with door status indicator LED. Manages floor door calls as standard. Complete with 2 x 8-position dip-switches for programming user code and buttons. Wall-mounted. The door-entry phone can be used in Simplebus2 2-wire systems with mixer art. 4888C, Simplebus2 with power supply art. 1210 or kit that use the power supply art. 1209. Complete with distribution terminal art. 1214/2C. Dimensions: 105x105x20 mm.

### AWARDS





**6750W**

**HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2**

**GENERAL DATA**

Height (mm)	105
Width (mm)	105
Depth (mm)	20

**HARDWARE FEATURES**

Removable terminals	Yes
---------------------	-----

**SETTINGS**

Loudspeaker volume control	Yes
Ringtone volume control	Yes

**ENVIRONMENTAL AND COMPLIANCE FEATURES**

Operating humidity (RH max) (%)	25 ÷ 75
---------------------------------	---------

**MAIN FEATURES**

Audio/video system	Yes
Wall-mounted	Yes
Hands-free function	Yes
Induction loop function	Yes
Product color	White
Sensitive Touch technology	Yes
Total buttons (n°)	5
LED signaling (no.) (n°)	3

**FUNCTIONS**

Actuator control function	Yes
Switchboard call function	Yes
Priority calls	Yes
Intercom function	Yes
Selective intercom call	Yes



**6750W**

**HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2**

**FUNCTIONS**

Call to multiple addresses	Yes
Privacy function	Yes
Doctor	Yes
Floor door call function	Yes
Electronic bell	Yes
Customisable ringtone	Yes
Key button function	Yes

**COMPATIBILITY**

Simplebus 2 audio/video system	Yes
Building Kit audio/video system	Yes
Kit audio/video system	Yes

**TECHNICAL CHARACTERISTICS**

Supply voltage	22÷35VDC
Absorption during communication (mA)	130
Operating temperature (°C)	5 ÷ 40
Product weight (g)	150
Clamps	L L CFP1 CFP2



**6750W**

## **HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2**

### **ACCESSORIES**



**6754 Adapter plate for Mini Handsfree audio**

Adapter plate for Mini Handsfree audio door-entry monitor.