

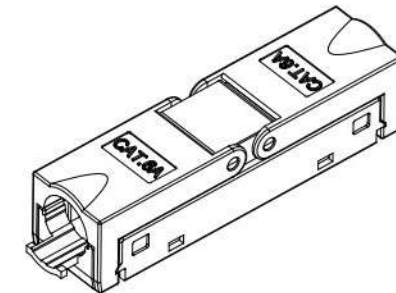



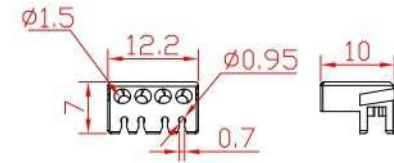
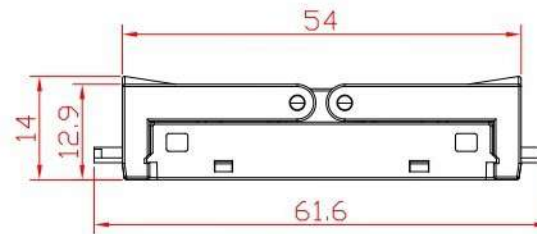



# VandalVeto®



## NOTES:

### ELECTRICAL:

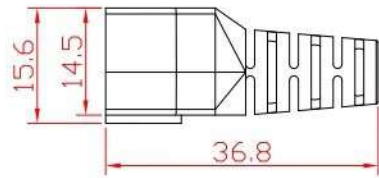


- 1.VOLTAGE RATING:125 VAC RMS
- 2.CURRENT RATING:1.5AMP
- 3.CONTACT RESISTANCE:100MILLIOHMS MAX
- 4.INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
- 5.DIELECTRIC STRENGTH:750 VAC RMS 60Hz,1MIN

### ENVIRONMENTAL:

- 1.STORAGE:-40°TO +85°
- 2.OPERATION:0°TO 70°

### MECHANICAL:

- 1.THE SHELL MATEERIAL:ZINC ALLOY
- 2.HOUSING MATERIAL:PC
- 3.PCB MATERIAL:FR-4 T=1.6mm
- 4.CONTACT MATERIAL:PHOSPHOR BRONZE  
STAMP PIN 0.30mm
- 5.IDC LIFE:200 TIMES MIN
- 6.WIRE:AWG 23-26

					 <b>VandalVeto®</b>		<b>אגבר אלקטרוניקה 2000 בע"מ</b> 		
					Material			Item No.	601052
					Angles Projection		Size	Scale	Unit
							A4	X:1	mm
					Sheet		1 OF 1		Version: A/0
SYM	Number	Bill No. of Alteration	Signature	Date			Part Name	STP Cat.6A coupler Toolless type	
Drawn			Tolerance				ERP		
Checked			0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30°				Part No.		
Approved									

• 03-5711450 : טקס • 03-5713004 : טל • 53583 : גבעתיים • רח' מורין 5, גבעתיים 53583 • [www.egber.com](http://www.egber.com) • [egber@egber.com](mailto:egber@egber.com)