

Resetable Switch Call Point

VandalVeto®



200045

300047



Special features



- Resetable design, 200045 obvious indicators around the edges of the unit.
- Press the pressing plate to enable the output function.
- Pressing plate with status (green and red) shown.
- Reversionary key with non-slip design.
- Built-in buzzer status.

- Input power range from DC12-24V to connect with all types of fire alarm system.
- Easy to assemble, outer case without screws, 3 set of output points to connect other equipment, embedded or surface installations to select. (Note: 300047 only has output point function.)


Specification

	200045	300047
Power Supply	DC 12V ~ DC24V $\pm 5\%$	×
Operation current	DC 12V : 18mA(standby)/75mA(operation) $\pm 5\%$ DC 24V : 11mA(standby)/41mA(operation) $\pm 5\%$	×
Buzzer	Set as silent, interval buzzing or continuous buzzing.	×
Indicator	Dual-color (red and green) . Red indicator to set blinking , off or on.	×
Output	N.O. · N.C.& COM. Output (Maximum load of 125V/3A)	
Material	ABS · PC	
Dimensions	90L × 93W × 45H (mm)	
Weight	300047 :192g / 200045 :208g (included wrapping)	

Status

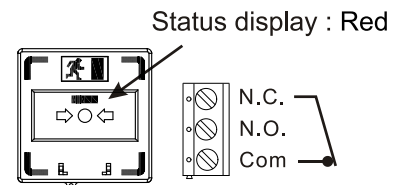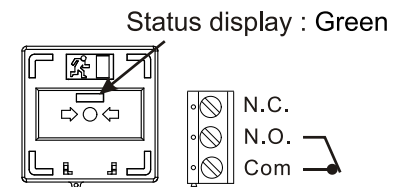

Structure diagram

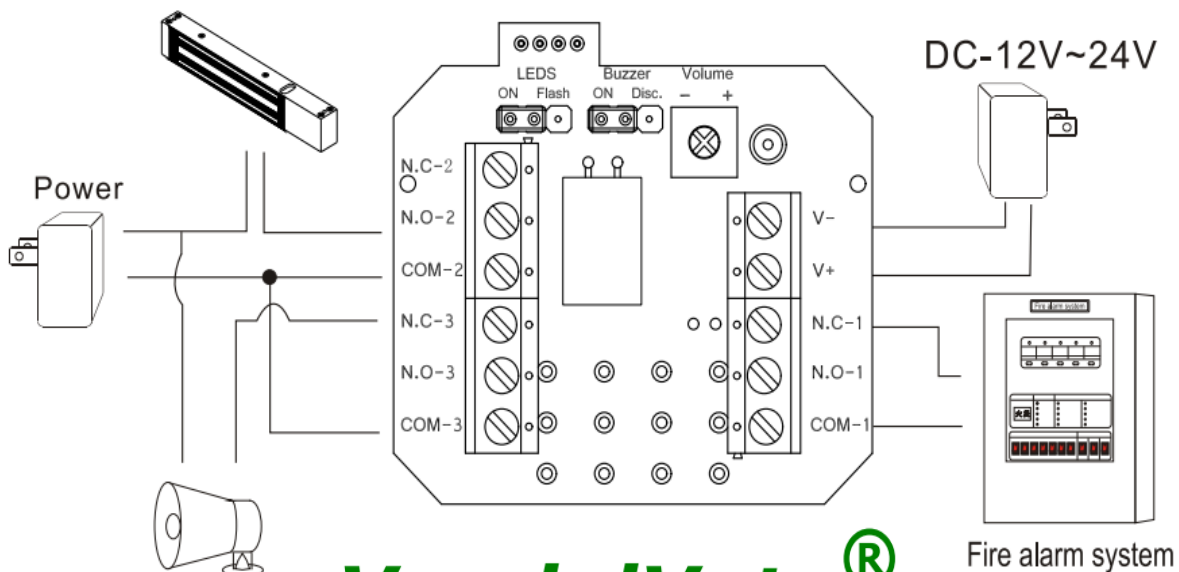

VandalVeto®