


4Core Shielded Security cable

Part Number:	300450
--------------	--------

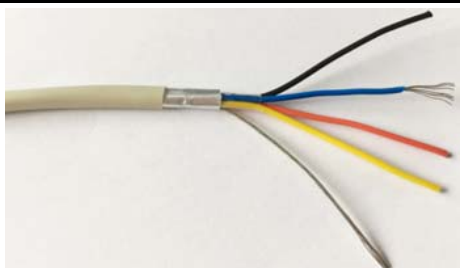

Applications: Control applications, Portable, indoor applications, Audio-frequency signals

General Construction: The cable contains 4 single cores, cabled together, overall shielded with a polyester-aluminum foil and jacketed with a soft FR PVC compound

CROSS SECTION	4 CORE SHIELDED SECURITY CABLE			
	1~4	Conductors	Stranded (7/0.25TC)	
		Conductor Number	7 Wires	
		Conductors OD	0.75±0.01 mm	
	1~4	Insulation	PVC, 1.32±0.05mm OD.	
		Total number of wires	4 core	
	Color code: Red.Black.Blue.Yellow.			
	5	Polyester tape	PET	
		Dielectric thickness	15*0.027 ±0.005 mm	
	6	Ground Wire	Stranded (7/0.25TC)	
		Overall Diameter	0.75±0.01 mm OD	
	7	AL/F	Single 100% min.	
		Dielectric thickness	15x0.03 mm AL/F,	
OD		3.6±0.10 mm OD.		
8	The tear line	210 D		
	Outer Jacket color	GREY		
	Jacket thickness	0.6 mm nom. 0.4 mm min.		
	Overall Diameter	4.76±0.25 mm.		

Surface Marking 1	300450 VandalVeto Security Shielded Cable 22AWG 4x0.25 200M----001M
Surface Marking 2	
Surface Marking 3	



EGBER ELECTRONICS 2000 Ltd

5Korazin st, 5358305 Givatayim
 Tel: 972-3-5713004 Fax: 972-3-5711450
 egber@egber.com www.egber.com