


**6Core Shielded Security Cable**


Part Number: 300451

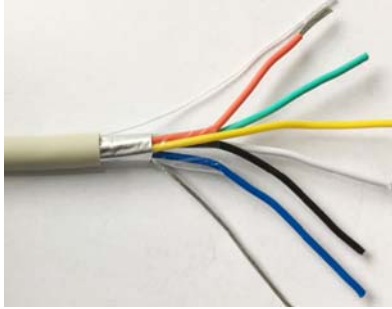

**Applications:** Control applications, Portable, indoor applications, Audio-frequency signals

**General Construction:** The cable contains 6 single cores, cabled together, overall shielded with a polyester-aluminum foil and jacketed with a soft FR PVC compound

**CROSS SECTION**

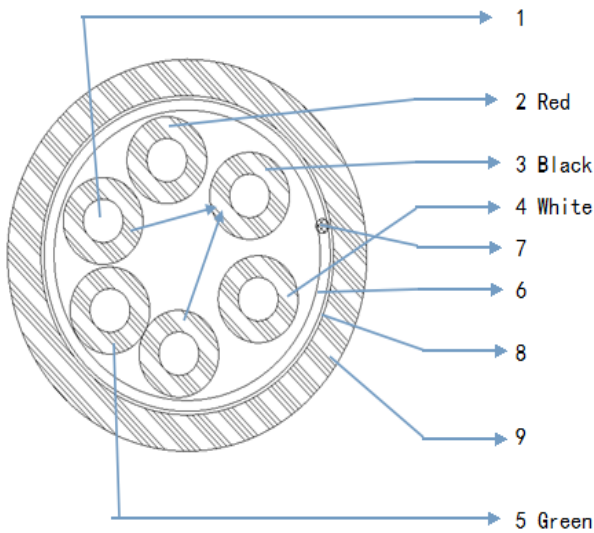

**6 CORE SHIELDED SECURITY CABLE**

1~5	Conductors	Stranded (7/0.25TC)
	Conductor Number	7 Wires
	Conductors OD	0.75±0.01 mm
1~5	Insulation	PVC, 1.32±0.05mm OD.
	Total number of wires	6 core
	Color code:Red.Black.Blue.Yellow.White Green	
6	Polyester tape	PET
	Dielectric thickness	18*0.027 ±0.005 mm
7	Ground Wire	Stranded (7/0.25TC)
	Overall Diameter	0.75±0.01 mm OD
8	AL/F	Single 100% min.
	Dielectric thickness	18x0.03 mm AL/F,
	OD	4.3±0.10 mm OD.
9	The tear line	210 D
	Outer Jacket color	GREY
	Jacket thickness	0.65 mm nom. 0.4 mm min.
	Overall Diameter	5.7±0.25 mm.

Surface Marking 1	300451 VandalVeto Security Shielded Cable 22AWG 6x0.25 200M----001M
Surface Marking 2	
Surface Marking 3	



**EGBER ELECTRONICS 2000 Ltd**

5Korazin st, 5358305 Givatayim  
 Tel: 972-3-5713004 Fax: 972-3-5711450  
 egber@egber.com www.egber.com