


VandalVeto®

TECHNICAL DATA SHEET

Drop Cable– 2X0.8 - 2Core 20AWG, PVC insulated and sheathed

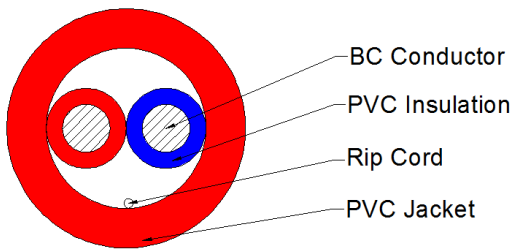

Part Number	300416	
1. Conductor	Material	Solid Bare Copper, Oxygen Free Copper
	Construction	1/0.80mm
	Nom. O.D.	$0.80 \pm 0.005\text{mm}$
	AWG Size	20AWG
2. Insulation	Material	Flame Retardant PVC
	Nom. O.D.	$1.4 \pm 0.1\text{mm}$
	Nom. Wall Thickness	0.30mm
	Min. Wall Thickness	0.25mm
	Color Codes	Red & Blue, 2 cores twisted
3. Rip Cord	Material	Stranded rip cord
4. Jacket	Material	Flame Retardant PVC, Red, RAL3000
	Nom. External O.D.	$4.4 \pm 0.2\text{mm}$
	Nom. Wall Thickness	0.8mm
	Min. Wall Thickness	0.7mm
Conductor DCR	35.5 Ω / Km, Max.	
Operating Temp.	-20C to 70C	
Voltage Rating	300 Volt, Max.	
Flame Rating	IEC 60332-1	
Packing Length	200m Cardboard Reel	
Packing Weight	5.7 Kg / 200m Reel	



אגבר אלקטרוניקה 2000 בע"מ



רח' כורזין 5, גבעתיים 5358305, טל: 03-5713004 פקס: 03-571150

www.egber.com egber@egber.com