



Product Data Sheet

DC107R4.7

Steel door recessed mount contact with 4.7K resistor

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Standard Features


- Special design for steel mounting
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC107R4.7

Steel door recessed mount contact with 4.7K resistor

Specifications

Operating gap	9 mm (max.)
Connections	4 wires, 2.5 m
Contact type	Resistor 4.7K
Dimensions (Ø x H)	22 x 39 mm
Hole required	19 mm

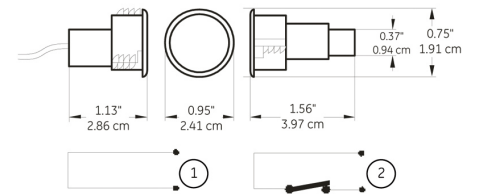

Ordering Information

Part No.	Description
DC107R4.7	Steel door recessed mount contact with 4.7K resistor

