


DATA SHEET

COD. 6801W

7" MAXI SERIES MONITOR. SBTOP SYSTEM

Colour monitor for flush-mounting (on Art. 6817) or wall-mounting (on support Art. 6820) with 7" 16/9 screen, hands-free full-duplex audio and touch sensitive controls. Allows brightness, contrast and audio volume control, plus adjustment of the volume of the ringtone, which can be customised with a choice of different melodies. Equipped as standard with control buttons for lock-release and audio enable/disable with relative indicator LEDs, plus 6 further buttons for self-ignition, privacy service and other programmable functions. Manages floor door calls and call repeat as standard. Complete with 2 x 8-position DIP-switches for user code programming and button programming. Equipped with riser distribution terminal Art 1214/2C. The monitor can only be used in 2-wire SimplebusTop Color systems. Dimensions: 223x124x25mm.

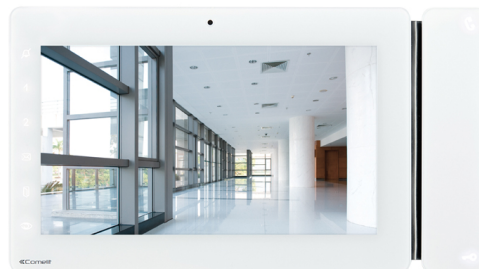

Hardware specifications

Removable terminals:	Yes
Total buttons:	14
Sensitive Touch technology:	Yes

Functions

Privacy function:	Yes
Display brightness control:	Yes
Alarm function:	Yes
Switchboard call function:	Yes
Floor door call function:	Yes
Actuator control function:	Yes
Privacy conversation function:	Yes
Intercom function:	Yes
Key button function:	Yes
Hands-free function:	Yes
Full Duplex hands-free function:	Yes
Display contrast control:	Yes
Loudspeaker volume control:	Yes
Ringtone volume control:	Yes

General info

Product height (mm):	124
Product width (mm):	223
Product depth (mm):	25
Product colour:	WHITE RAL9003
Operating temperature (°C):	-5/55

The technical specifications are subject to variations without warning

DATA SHEET

Self-ignition:	Yes
Customisable ringtone:	Yes

Compatibility

Video door entry family:	Yes
Simplebus Top system:	Yes
Simplebus Color system:	Yes

Mounting/Installation

Flush-mounted:	Yes
Wall-mounted:	Yes
Desk base-mounted:	Yes

Audio/video specifications

Display size (inches):	7
B/W or colour display:	COLOR
Display resolution (H x V):	800x480 pixel
Audio/video system:	Yes
Type of display:	LCD

Electrical specifications

Maximum current absorption (mA):	400
----------------------------------	-----

Packaging

Single pack height (mm):	70
Single pack width (mm):	159
Single pack depth (mm):	259
Single pack volume (dm3):	2,88